




DROP FORGED TURNBUCKLES

Generally to DIN 1480

Available in:

- Eye-Eye (EE)
- Hook-Hook (HH)
- Eye-Hook (EH)
- Weldable ends (W)
- Material: Drop forged mild steel
- Standard: Generally to DIN 1480
- Finish: Electro-galvanized (Weldable ends, self coloured)

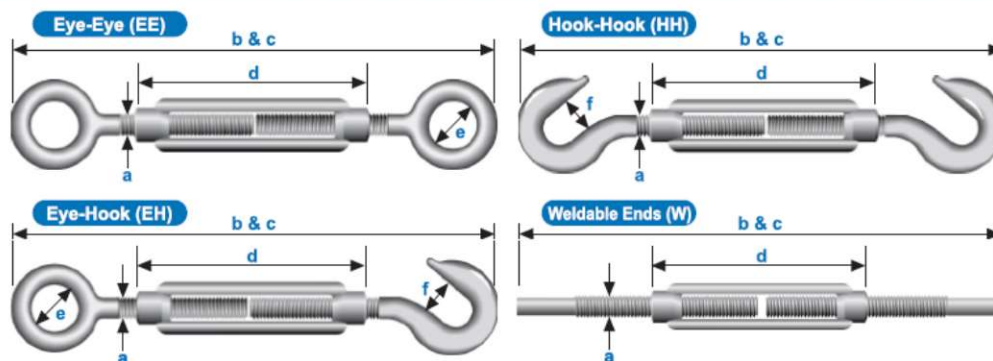

SPECIFICATIONS

Diameter Thread a mm	Overall Closed Length				Overall Open Length				Body Length d mm	Eye Inside Diameter e mm	Hook Opening f mm	Max Tension tons
	EE b mm	HH b mm	EH b mm	W b mm	EE c mm	HH c mm	EH c mm	W c mm				
6	160	184	172	240	246	270	258	326	110	9	8.0	0.22
8	168	200	184	240	248	280	264	320	110	10	10.5	0.41
10	210	234	222	300	300	323	311	389	125	14	13.0	0.66
12	222	260	241	300	305	343	324	383	125	16	16.0	0.94
14	244	278	261	330	334	368	351	420	140	18	18.0	1.32
16	300	322	311	400	416	438	427	516	170	22	20.0	1.80
20	334	382	358	440	466	514	490	572	200	24	21.0	2.75
22	372	456	414	440	527	601	559	585	220	27	24.0	3.30
24	410	496	453	520	587	673	630	697	255	27	26.0	4.00
30	440	550	495	520	605	715	660	685	255	31	34.0	6.62
36	554	640	597	600	740	825	782	780	295	38	46.0	9.28


Maximum tension applies to eye and eye, others 33.3% of maximum tension.

DIE CAST TURNBUCKLES

Commercial Quality

Available in:

- Eye-Eye (EE)
- Eye-Hook (EH)
- Material: Body - Zinc Die Cast Hook and Eye - C15 (Bowed)
- Finish: Electro-galvanized

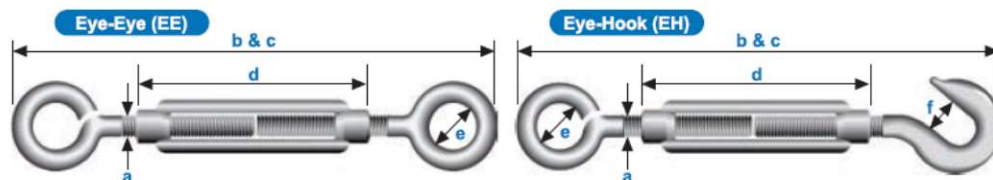

SPECIFICATIONS

Diameter Thread a mm	Take up mm	Overall Closed Length		Overall Open Length		Body Length d mm	Eye Inside Diameter e mm	Hook Opening f mm
		EE b mm	EH b mm	EE c mm	EH c mm			
4	29	85	77	114	106	45	7	5
5	47	105	109	152	156	70	8	6

Also available: Stainless Steel Turnbuckles in 5, 6, 8, 10, 12, 16 and 20mm thread sizes.