



**HARU®**



# FALL ARRESTORS

A range of retractable lifelines that reduces the shock loading on the body by limiting the distance of fall. Used in work inspection, general construction, maintenance, oil production, telecommunications, mining and confined work areas.

HARU® Fall Arrestors provide continuous protection against falls. The Fall Arrestor automatically extends and retracts to allow freedom of movement. Each unit includes anchorage ropes.

HARU® Fall Arrestors are manufactured in a ISO 9001:2008 factory and all products are CE approved.



FAHB02,0N



FAHB03,5N



FAHB06N



FAHB10

FAHB06



FAHB15



FAHB20

## SPECIFICATIONS - FALL ARRESTORS TO EN360

Product Code	Type	Length (m)	Weight (kg)	Safe Load (kg)
FAHB02,0N	Dyneema Webbing	2	1,6	140
FAHB03,5N	Dyneema Webbing	3,5	1,6	140
FAHB06N	Dyneema Webbing	6	1,6	140
FAHB06	Steel wire rope	6	4,5	140
FAHB10	Steel wire rope	10	4,8	140
FAHB15	Steel wire rope	15	6,6	140
FAHB20	Steel wire rope	20	8,6	140

## SPECIFICATIONS - DOUBLE FALL ARRESTORS TO EN360

Product Code	Type	Length (m)	Weight (kg)	Safe Load (kg)
FAMET02,0	Steel wire rope	2	3,6	140
FAMBT01,5N	Dyneema Webbing	1,5	2,4	140
FAMBT02,0N	Dyneema Webbing	2	2,4	140

**FAME & FAMB Fall Arrestors can be supplied individually**



Always read the instruction manual before use  
Always wear the correct safety gear



FAMB-2N



FAMB-2N

# HARU®

## RECOVERY FALL ARRESTOR

A range of retractable lifelines that reduces the shock loading on the body by limiting the distance of fall. Used in work inspection, general construction, maintenance, oil production, telecommunications, mining and confined work areas.

HARU® Fall Arrestors provide continuous protection against falls. The Fall Arrestor automatically extends and retracts to allow freedom of movement.

HARU® Fall Arrestors are manufactured in a ISO 9001:2008 factory and all products are CE approved.



**FARFA**

- Fall arrest mode or decent (rescue)
- Self-retracting SWR on drum with centrifugal brake
- Anti-ratcheting locking system
- Fall indicator
- Includes mounting bracket for tripod attachment

### SPECIFICATIONS - FALL ARRESTORS/RETRIEVAL/RESCUE

Product Code	Type	Length (m)	Width/Ø (mm)	Weight (kg)	Working Load (kg)
FARFA15	Steel wire rope	15	4,8	11,8	150
FARFA35	Steel wire rope	35	4,8	18,6	150


**CAUTION!** Always read the instruction manual before use  
Always wear the correct safety gear



### SPECIFICATIONS - TRIPOD - EN795 APPROVED

Product Code	Material	Height (M)	Wire Dia. x Length	Safe Load (9 kg)	Weight (kg)
FATPC	Aluminium	1.35 - 2.40	5mm x up to max. 35m	150	20 (Excl. Rope)

- For confined space and rescue applications
- Adjustable height
- Additional cable pulley and point to attach to retractable lifeline
- For manhole max. diameter 1.5m and under
- Can be fitted with Haru Recovery Fall Arrestor

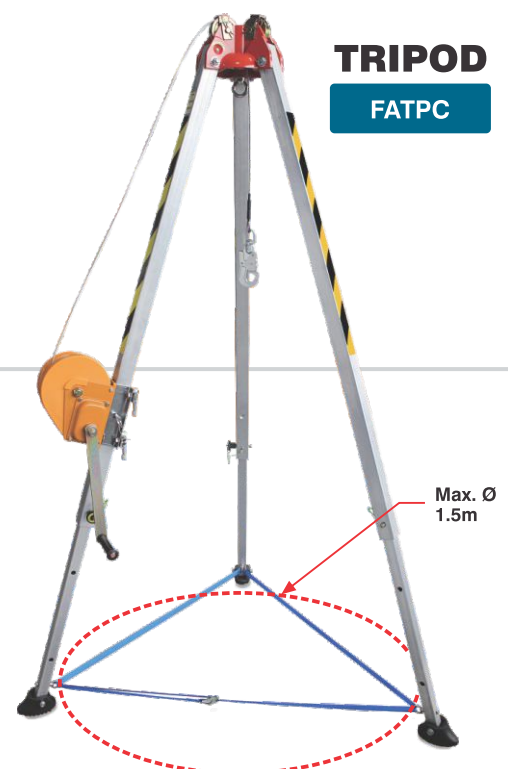

**TRIPOD**

**FATPC**