


YORK ABRASIVES Cartridge Rolls

Spirally wound aluminium oxide cloth rolls that wear in use constantly exposing new abrasive. Used for weld flash removal, deburring, blending and polishing applications. Available in two types. A steel mandrel must be used to secure the abrasive to the tool.

Maximum Running Speeds:

Up to 12mm dia. 22,000rpm.
Up to 19mm dia. 18,000rpm.
Up to 25mm dia. 10,000rpm.

Straight Type

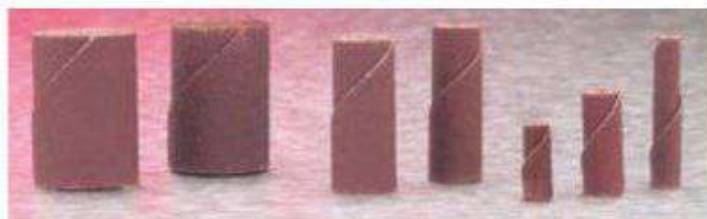

Diameter x Length (mm)	Type	Grit	Weight per 100	Order Code YRK-205
3 x 19	CR1	P80	100g	-7010K
		P120		-7020K
6 x 19	CR3	P80	150g	-7050K
		P120		-7070K
6 x 25	CR4	P80	200g	-7080K
		P120		-7250K
6 x 38	CR4	P80	200g	-7260K
		P120		-7090K
9.5 x 25	CR5	P80	265g	-7110K
		P120		-7120K
9.5 x 38	CR6	P60	400g	-7150K
		P80		-7155K
12 x 38	CR8	P120	670g	-7160K
		P60		-7190K
19 x 38	CR10	P60	1500g	-7200K
		P120		

Mandrels

For use with Cartridge Rolls. This steel adaptor is used to secure and hold both tapered and parallel sided cartridge rolls to air grinders or electric drills. This holder is used by sliding the cartridge roll onto the mandrel pilot until the bottom of the abrasive touches the threaded steel area. Simply screw the cartridge roll onto the threads to secure. Your mandrel should be at least 13mm longer than your cartridge roll.



Shank Diameter	Type	To suit Rolls	Weight per 5	Order Code YRK-205
3mm	CRM1	CR1	35g	-7510K
		CR3		
6mm	CRM3	CR4	55g	-7530K
		CR5		
6mm	CRM4	CR7	55g	-7540K
		CRT1		
		CRT2		
		CRT4		
		CR6		
		CR8		
6mm	CRM5	CRT3	55g	-7550K
		CRT5		
		CRT6		
		CR10		
6mm	CRM7	CR11	80g	-7570K



Taper Type

Tapered for angles, corners and irregular or concave surfaces.



Diameter x Length (mm)	Type	Grit	Weight per 100	Order Code YRK-205
9.5 x 25	CRT1	P60	235g	-7310K
		P120		-7320K
9.5 x 38	CRT2	P80	256g	-7315K
		P60		-7330K
12 x 25	CRT3	P60	270g	-7350K
		P80		-7355K
12 x 38	CRT3	P80	460g	-7360K
		P120		

Cartridge Roll Kit

Spirally wound aluminium oxide cloth roll that wears in use, constantly exposing new abrasive. Used for weld flash removal, deburring, blending and polishing applications.

Contents:

Straight type rolls: 6 - 10 x 38mm P80 and P120, 4 - 13 x 38mm P80 and P120, 12 - 6 x 38mm P80 and P120, 16 - 6 x 25mm P80 and P125, 6 - 10 x 25mm P80 and P120.

Taper type rolls: 6 - 10 x 38mm P80. 6 - 13 x 38mm P80.

Mandrels: 1 - 3 x 25 x 6mm, 1 - 3 x 19 x 6mm.

**122
PIECES**



Order Code
YRK-205
-9800K