


GRADE 100 ALLOY SWIVEL HOOKS

With Ball Bearing. Performs full swivel under load.



- Ideally suited for hydraulic truck cranes and other lifting applications
- Proof tested to 2.5 times of 4:1 WLL. (** Proof tested to 2 times of 5:1 WLL)
- 20 000 cycle fatigue rated to 1.5 times of 4:1 WLL. (**20 000 cycle fatigue rated to 1.5 times of 5:1 WLL)
- Manufactured from the finest quality alloy steel and are quenched and tempered
- All hooks are 100% magnaflux crack detected
- Hooks have batch numbers for traceability
- Hooks embossed with WLL at 5:1 Safety Factor on a raised portion. *When used with Grade 80 or Grade 100 chain and in applications where a 4:1 Safety Factor is required, this needs to be removed*

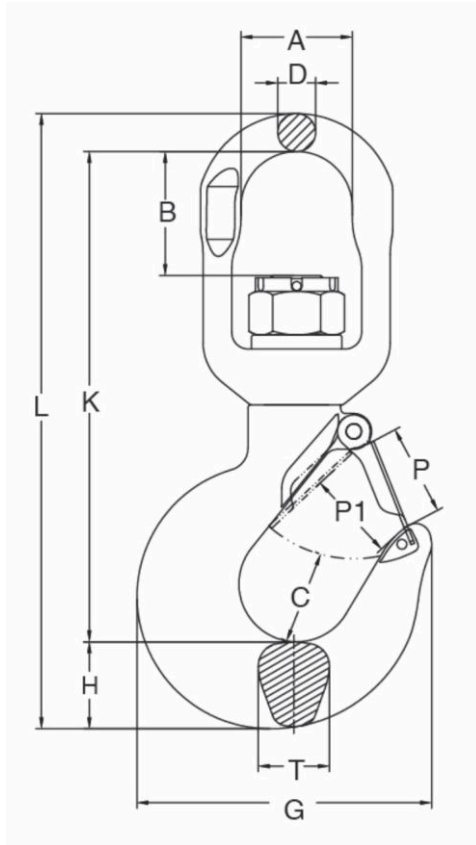

Item Code	Working Load Limit: Tonnes		Dimensions (mm)											Safety latch Spare Part Item Code	
	5:1 Safety Factor	Grade 100 4:1 Safety Factor	A	B	C	D	G	H	K	L	P	P1	T		Kg
GHSBH16	7	10	61	51	49	23	166	46	258	328	45	39	42	5.6	GHSLSBH16
GHSBH20	11	16	74	82	62	25	196	58	326	409	61	57	48	9.5	GHSLSBH20
GHSBH22	15	19	97	96	65	33	221	64	372	471	72	62	56	16	GHSLSBH22
GHSBH26	22	26.5	123	116	71	51	277	76	469	599	86	81	68	33.5	GHSLSBH26
GHSBH30	30		123	116	87	51	353	93	503	651	89	83	76	45	GHSLSBH30

**